

BeanDevice® WILLOW® AX-3D

ULP (ULTRA-LOW-POWER) WIRELESS IOT VIBRATION SENSOR

MADE IN GERMANY

2year
Warranty

WiFi
CERTIFIED

CE FC

001A-08148

PRODUCT VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING



STEP FILE




MQTT TOOLKET FOR IOT
SENSOR



MAIN FEATURES

- ULP (Ultra Low Power) Wifi technology
- 772900 data logs per sensor channel (streaming mode)
- High precision accelerometer (measurement range $\pm 2g$) with FFT, PPV (Peak-Particle Velocity) and Amplitude calculations
- Waterproof (IP67/NEMA 6) and Rugged aluminum casing,
- Over the Air Firmware upgrade via WIFI
- Virtual Inclinometer

- USB 2.0 link for device configuration (including firmware upgrade)
- Store and Forward+: lossless data transmission
- Excellent radio link relying on the radio antenna diversity designed by Beanair®
- IOT Ready: integrates MQTT data exchange, an open-source Internet of Things (IOT) protocol
- Smart and Flexible power supply :
- Internal Rechargeable Lithium Battery (780 mAh)
- External 5VDC power supply compatible with both USB power and solar energy harvesting

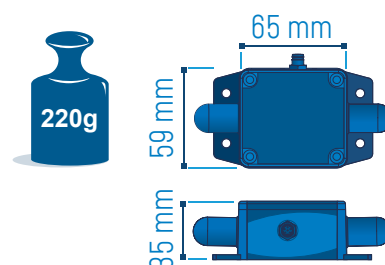


APPLICATIONS

Test and Measurement



Structural Health Monitoring

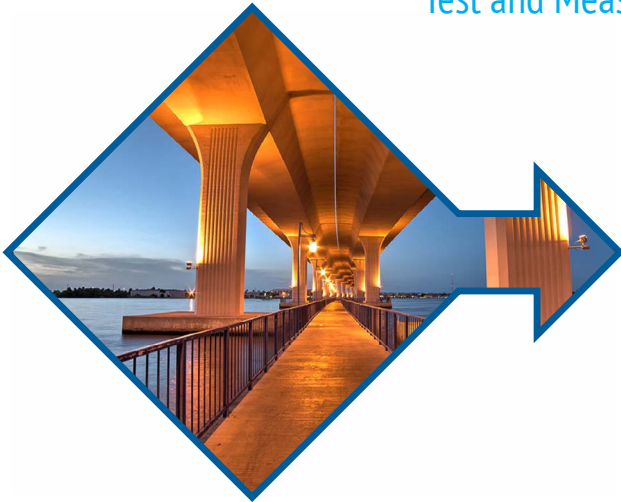

Ground Vibration Monitoring




AN OPEN-STANDARD & INDUSTRIAL WIFI TECHNOLOGY

- ULP (Ultra Low power) Wifi – IEEE 802.11 b/g/n
- Lower total cost of ownership-works with existing access points
- Large installed base and consequent broad-based familiarity with configuration, use and troubleshooting at the physical and link layers
- Easy provisioning & IT friendly: our ULP wifi sensors use IP-over-Ethernet networking environment



BeanDevice® WILLOW® AX-3D

MQTT | OPEN-STANDARD INTERNET OF THINGS PROTOCOL.

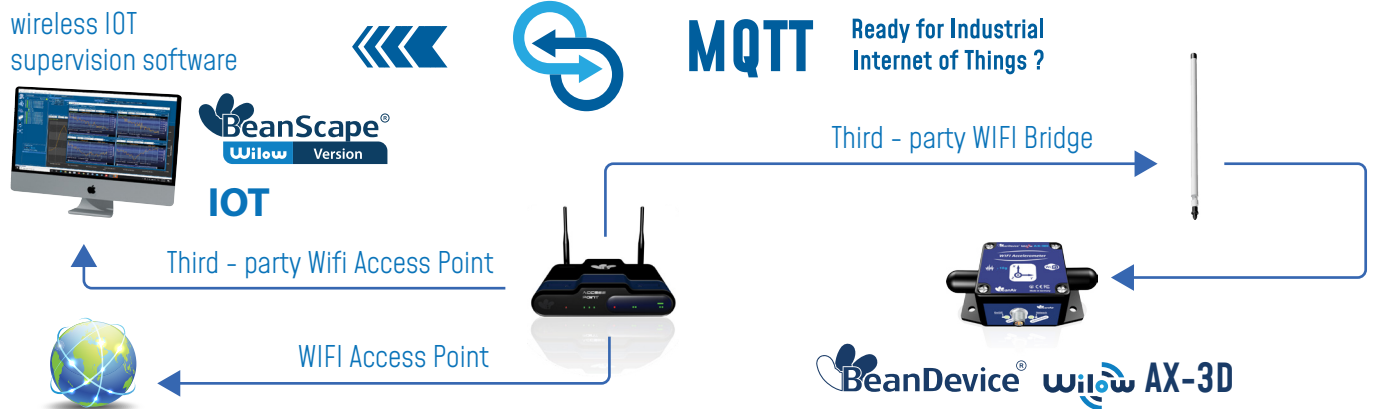

EHR-AUXILIARY POWER SUPPLY COMPATIBLE WITH SOLAR ENERGY HARVESTING 8-24VDC



A RELIABLE WIFI TECHNOLOGY THANKS TO OUR "STORE AND FORWARD+" FUNCTION



The store and forward technique works by storing the message transmitted by the **BeanDevice® Wilow** (wireless DAQ/sensor) to a Wifi access point/ Wifi receiver. If the message is not received due to a network disruption, it will be retransmitted on the next transmission cycle. This technique allows to bring a lossless data transmission.

User can also enable the Hard real-time option; i.e. the message must be received by the Wifi Access Point/Wifi Receiver within the confines of a stringent deadline. It is automatically deleted if it failed to reach its destination within the allotted time span

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

BND-WILOW-WIFI-AX3D-MR-EXPWR-MO-HG

MR - Measurement Range:	MO - Mounting option	EXPWR - Auxiliary External Power supply	-HG - High Gain External Antenna 5dBi
2G: ±2g measurement range	BR - 90° Mounting bracket	EHR - Power supply compatible with solar energy harvesting 8-24VDC	If this field is left blank, Integrated Radome Antenna will be provided
	M - Magnetic Mounting		

Example 1: BND-WILOW-WIFI-AX3D-2G-BR

ULP WIFI accelerometer with ±2g range with 90° Mounting bracket , integrated radome antenna

Example 2: BND-WILOW-WIFI-AX3D-2G-M

ULP WIFI accelerometer with ±2g range with magnetic mounting, Integrated radome antenna

Example 3: BND-WILOW-WIFI-AX3D-2G-HG

ULP WIFI accelerometer with ±2g range with High Gain External Antennas

MAIN ACCELEROMETER SPECIFICATIONS

Accelerometer technology	High precision accelerometer based on MEMS technology
measurement range	±2g
Sensitivity	660 mV/g
Typical non-linearity	±0.1% FS
Analog to Digital converter	24-bit delta-sigma with temperature compensation Synchronous measurement channel. Data are transmitted in 12-bits format for better network management
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	2 kSPS per axis
Noise spectral density	45 µg/√Hz
Zero-g Offset Variation from RT over Temp	±0.2 mg/°C
Sensitivity Variation from RT over Temp	±2g Version : ±0.01 %/°C (XY), ±0.02 %/°C (Z)
Offset Ratiometric Error	4mg
Sensitivity Ratiometric Error	±1.25 % (X-Y), ±0.2 % (Z)
Cross Axis Sensitivity	0.02
Onboard temperature sensor	Range -40°C to +65°C , accuracy ±1°C
Anti-aliasing Hardware filter	Butterworth 2th order filter
Calibration	Factory calibrated with calibration settings backed up on the sensor Flash memory. Calibration method used : Back-to-back calibrated with a reference sensor. Sensors can be re-calibrated by the user.

ADVANCED VIBRATION ANALYSIS TOOL (AVAILABLE ON BEANSCAPE® WILLOW® PREMIUM AND RA)

Software Filter	<ul style="list-style-type: none"> • Low-Pass Infinite Impulse Response Filter (IIR)
Fast Fourier Transform (FFT)	<ul style="list-style-type: none"> • Online and Offline FFT • FFT Window Type (offline FFT only): Recangular/Hamming/Hann/Blackman/Blackman Harris/ Gaussian/Kaiser/Taylor/Triangular/Flattop/Bartlett Hann • Automatic FFT Report (Email Transmission) • Configurable Number of FFT points, 128 to 32768 points
Peak Particle de Velocity (PPV)	<p>Available only on the BeanDevice® Wilow® AX-3D with $\pm 2g$ of range:</p> <ul style="list-style-type: none"> • PPV Log file (Email Transmission) • Automatic DIN4150-3 report (Email Transmission)
Displacement measurement	<p>Available only on the BeanDevice® Wilow® AX-3D with $\pm 2g$ of range</p>

REMOTE CONFIGURATION PARAMETERS

Data Acquisition mode (SPS = sample per second)	<ul style="list-style-type: none"> • Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour • Alarm -Low duty cycle: 1s to 24 hour • Streaming mode : 100 SPS by default • Streaming with event-trigger (SET) Mode : 100 SPS by default
Sampling Rate (in streaming mode)	<p>Minimum: 1 SPS per axis Maximum: 2 kSPS per axis</p>
Alarm Threshold	High and Low Levels alarms
Power Mode	Battery Saver & Active power modes

RF SPECIFICATIONS

Wireless Protocol Stack	IEEE 802.11 b/g/n
WSN Topology	Point-to-Point / Star / Cluster-Tree
Crypto Engine	WPA2, WPS2
Data rate	UDP: 16 Mbps TCP: 13 Mbps
RF Characteristics	ISM 2.4GHz. Antenna diversity designed by Beanair®
TX Power	18 dBm @ 1 DSSS 14.5 dBm @ 54 OFDM
Rx Sensitivity	-95.7 dBm @1 DSSS -74.0 dBm @54 OFDM
Maximum Radio Range	With High Gain Antenna : 100-200m (L.O.S), 40-80m (N.L.O.S.) With Integarted Radome Antenna : 50-100m (L.O.S), 20-50m (N.L.O.S.) In both case Radio Range can be extended by adding Wifi Bridge/Repeater"
Antenna	Antenna diversity : High Gain Antenna : 2 x N-Type Antenna 5dBi Radome Antenna : 2 x Antenna 2,2 dBi
OTA	Over the air firmware upgrade via WIFI

USB SPECIFICATIONS

USB standard	USB 2.0
Data Rate	Full speed operation(12MB/s)
Related functions	<ul style="list-style-type: none"> • Firmware update • Wifi & system configuration

EMBEDDED DATA LOGGER

Storage Capacity	772900 data logs per sensor channel (streaming mode)
Wireless data downloading	2 minutes to download the full memory (average time)

ENVIRONMENTAL AND MECHANICAL

Casing	Aluminum casing Dimensions in mm (LxWxH):35x59x65 mm without antenna & eyelet, Weight (with internal battery, w/o mounting option) : 220g
IP NEMA Rating	IP67 Nema 6
Shock resistance	100g during 50 ms
Operating Temperature	-40 °C to +65 °C
Norms & Radio Certifications	<ul style="list-style-type: none"> • CE Labelling Directive R&TTE (Radio) ETSI EN 300 328(Europe) • FCC (North America) • ARIB STD-T66 Ver. 3.6 (Japan) • ROHS - Directive 2002/95/EC

POWER SUPPLY

Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 900 mAh
Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring
Battery Life	see Battery life table herefater and battery life simulation toolkit available on our website
External power supply	<ul style="list-style-type: none"> • USB Power supply 5V • Optional auxiliary external Power Supply: 8VDC to 24VDC compatible with solar energy harvesting

INCLUDED ACCESSORIES

M8 plastic cap	1pcs, Ref: WL-PC
M8 to USB cable	1pcs M8-6pins to USB Cable, 2 meters length. Ref: WL-CBL-M8-6P-USB-2M
Magnet for power on/power off	1pcs Magnet. Ref: WL-MGN
Wall mounting kit	4 pcs M5 screws+ Locknut. Ref: WL-WIFI-SCMKIT

OPTIONAL ACCESSORIES AND SERVICES

Power-supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with USB plug. Provided with power adapter: North America/Japan/China or Europe or UK or Australia REF: WL-USB-5V-PWR
M8 Cable	M8-6Pins Cable, Waterproof (IP67) and shielded cable , cable length : • 2 meters. Ref: WL-CBL-M8-6P-2M • 5 meters. Ref: WL-CBL-M8-6P-5M
Standalone solar power system	High efficiency solar panel with Solar charging controller and Lead-acid battery Ref.: X-SOL-7AH-20W-5V-5M for USB power Ref.: X-SOL-7AH-20W-12V-5M for- EHR VERSION Ref: X-SOL-14AH-20W-4CH-5V-5M for USB power Ref: X-SOL-14AH-20W-4CH-12V-5M for -EHR VERSION Ref: X-SOL-14AH-80W-4CH-5V-5M for USB power Ref: X-SOL-14AH-80W-4CH-12V-5M for -EHR VERSION More options and references are available on X-SOLAR datasheet

OPTIONAL ACCESSORIES AND SERVICES

Solar Panel	Polycrystalline Solar Panel for BeanDevice® Wilow® power supply Maximum Power : 5W , Optimum operating Voltage: 12 VDC Protection Frame: Aluminum Frame , Waterproof IP67 The 3W solar panel works only with LowDutyCycle & Survey/Alarm data acquisition with battery saver mode enabled The 5W solar panel works only with LowDutyCycle, Survey/Alarm & streaming burst data acquisition with battery saver mode enabled Country of origin: solar panel from China, assembled and tested in Germany REF: WL-SLP-5W-2M ,5W Solar panel with 2 meters of cable length REF: WL-SLP-5W-5M ,5W Solar panel with 5 meters of cable length
Calibration certificate	Calibration certificate provided by Beanair GmbH A static calibration method is used on a granite surface plate DIN876 Ref: WL-CERT-CAL

Conditions: Battery saver mode enabled , Temperature 25degC, BeanDevice listening to new config every 18h

Battery Saver mode Enabled, Measurement Cycle every minute

Battery Saver mode Enabled, Measurement Cycle every 5 minutes

Battery Saver mode Enabled, Measurement Cycle every hour

Battery Life with Slow Measurement Rate (LDCDA) Internal LiPO Battery

40 days

72 days

88 days

Conditions: Battery saver mode enabled , Temperature 25degC, BeanDevice listening to new config every 18h

Battery Saver mode Enabled, Measurement Cycle 20s to 1 measurement per day

**Battery Life with Slow Measurement Rate (LDCDA)
External 5W Solar Panel (REF: WL-SLP-5W-2M)
EHR Option**

>= 3 years (depends on battery cycle life)

Conditions: Battery saver mode enabled
Temperature 25degC

Wakes up every 2 hours, Sample at 200Hz during 20s

Wakes up every 1 hour, Sample at 500Hz during 20s

Wakes up every 20 minutes, Sample at 200Hz during 20s

**Battery Life with Fast Measurement Rate
[Streaming Burst]- Internal Battery**

54 days

34.5 days

18 days

Conditions: Battery saver mode enabled
Temperature 25degC

All timing combinatios related to streaming burst option

**Battery Life with Fast Measurement Rate (Streaming
Burst)- with X-SOLAR-7AH or X-SOLAR-14AH**

>= 3 years (depends on battery cycle life)

Conditions: 25degC

Sampling Rate 2000Hz

Sampling Rate 1000Hz

Sampling Rate 100Hz

**Battery Life with Fast Measurement Rate
[Continuous Streaming]- Internal Battery**

11hours 52 minutes

13hours 41 minutes

19hours 46 minutes

Conditions: 25degC

Sampling Rate 10Hz to 2000Hz

**Internal Battery Life with Fast Measurement Rate
[Continuous Streaming]-with X-SOLAR-7AH
or X-SOLAR-14AH**

>= 3 years (depends on battery cycle life)


BeanDevice® WILOW® AX-3D

BEANDEVICE® WILOW® FRONT VIEW





EXTERNAL POWER SUPPLY WIRING CODE

M8-6Pins socket [Male, A-Coding] - PIN ASSIGNATION

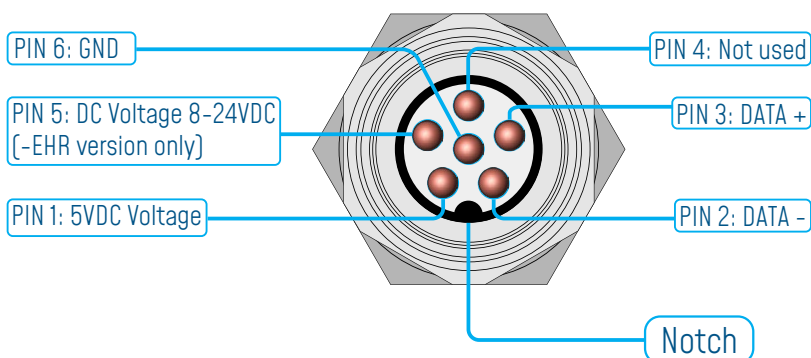

Interface Name	M8 Pin assignment
5VDC Voltage	PIN 1
DATA -	PIN 2
DATA +	PIN 3
Not used	PIN 4
DC Voltage 8-24VDC (-EHR version only)	PIN 5
GND	PIN 6

M8-6Pins Plug [Female, A-Coding] - PIN ASSIGNATION

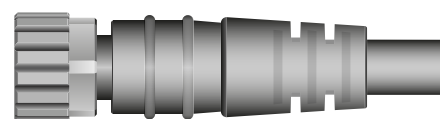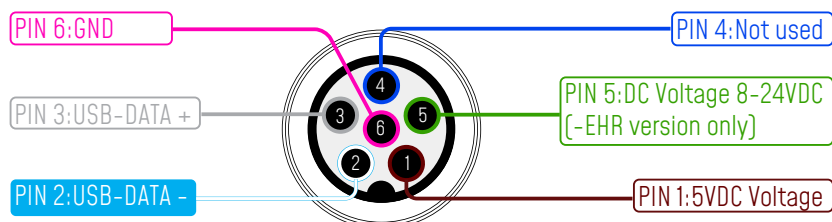

M8-6Pins Plug

Interface Name	5VDC Voltage	USB DATA -	USB DATA +	Not used	DC Voltage 8-24VDC (-EHR version only)	GND
M8 Pin assignment	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6
Wire Color [A-coding]	BROWN	WHITE	GREY	BLUE	GREEN	PINK

MECHANICAL MOUNTING OPTIONS

By default, the [BeanDevice® Wilow®](#) comes with a screw mounting lid.

Two other mounting options are available:

- Magnetic mounting, add the extension –M on your product reference
- 90° bracket, add the extension –BR on your product reference



Mechanical Mounting Options Video



CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051



www.facebook.com/BeanAir



www.beanair.com



www.youtube.com/user/BeanairSensors



www.twitter.com/beanair

