

BeanDevice® 2.4GHz AN-mV

Wireless IOT Data Acquisition (DAQ) Instrument
low voltage inputs ($\pm 20\text{mV}$) | built-in datalogger

PRODUCT VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING



STEP FILE



MADE
IN
GERMANY



2year
Warranty



690gr

77 mm



149 mm

60 mm



MAIN FEATURES



• Analog inputs $\pm 20\text{mV}$ (4 channels)



• Wireless transmission IEEE 802.15.4 with antenna diversity



• Integrated sensor power supply, software configurable 4.5V to 20V



• Embedded data logger up to 1 million data points



• Integrated rechargeable Lithium-Ion battery





• Measurement repeatability less than $\pm 0.025\%$ on the full scale

APPLICATIONS



Structural Health Monitoring

Condition monitoring

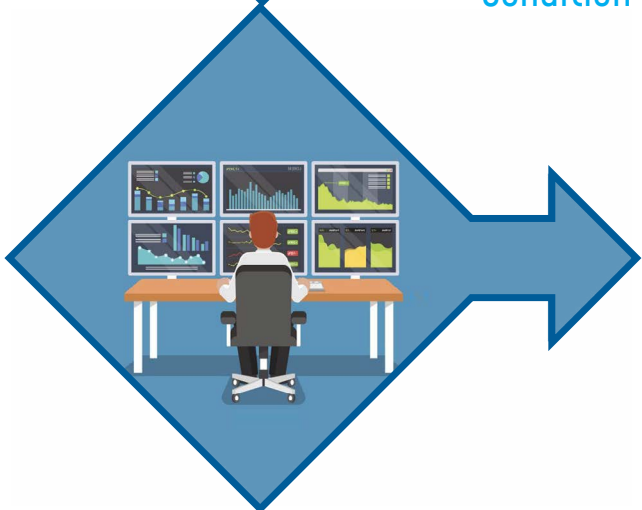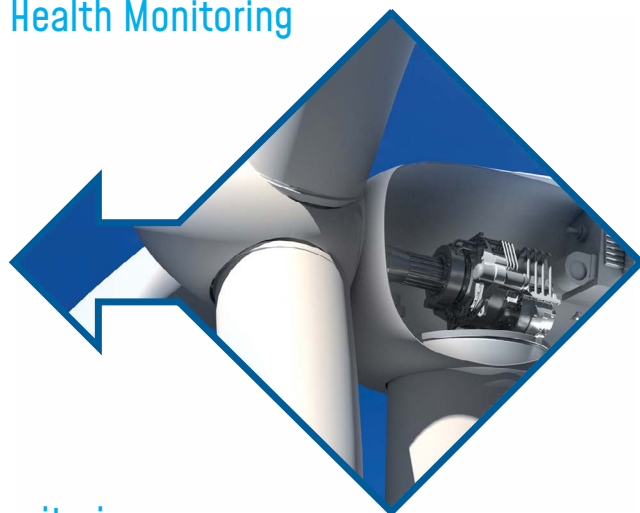

Remote Monitoring

EMBEDDED DATA LOGGER UP TO 1 MILLION DATA POINTS

The **BeanDevice® 2.4GHz AN-mV** integrates an embedded data logger, which can be used to log data when a Wireless Network can not be easily deployed on your site. All the data acquisitions are stored on the embedded flash and then transmitted to the Wireless receiver (**BeanGateway® 2.4GHz**) whenever a Wireless Networks is established.

The datalogger function is compatible with all the data acquisition mode available on your **BeanDevice® 2.4GHz AN-mV**

- Low Duty Cycle data acquisition with a measurement heartbeat from 1s to 24h
- Alarm data acquisition with three levels of Alarms (Alert/Action/Alarm)
- Streaming measurement up to 400 samples per second



REMOTE CONFIGURATION & MONITORING

The **BeanScope® 2.4GHz** software helps the user to view all the data measurements transmitted by the **BeanDevice® 2.4GHz AN-mV**.

Different data acquisition modes can be remotely configured from the software:

- **Low Duty Cycle Data Acquisition mode (LDCDA)** : the data acquisition is immediately transmitted by radio.
The transmission frequency can be configured from 1s to 24h.
- **Alarm Mode** : the measured value is transmitted by radio whenever an alarm threshold (fixed by the user) is detected (3 alarms threshold levels are available Alert-Action-Alarm).
The device sends frequently a beacon frame informing its current status.
- **Streaming** : All measured values are transmitted by packet within a continuous flow at 400 samples per second



For further information about data logger, please read the following technical note :
[TN-RF-008-Data-acquisition-modes-available-on-the-BeanDevice](#)

CONFIGURABLE SENSOR POWER SUPPLY

The sensor is directly powered by a high accuracy and adjustable DC/DC converter integrated inside the device. The excitation voltage is remotely configurable through the **BeanScape® 2.4GHz** (4.5 to 20V).



GETTING STARTED WITH A WIRELESS IOT SENSORS

The **BeanDevice® 2.4GHz AN-mV** operates only on our Wireless IIOT Sensors, you will need the **BeanGateway® 2.4GHz** and the **BeanScape® 2.4GHz** for starting a wireless IIOT sensors

BeanAir

BeanDevice
AN-mV



OR



BeanGateway
INDOOR VERSION



BeanGateway
OUTDOOR VERSION



BeanScape
Wireless IIOT Sensors Supervision software

Product specifications are subject to change without notice.
Contact Beanair for latest specifications.

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

BND-2.4GHZ-AN-MV-4CH

ANALOG DATA ACQUISITION SPECIFICATIONS

Signal Conditioning	Analog low voltage mV, suitable for Strain Gage based sensors
Number of analog inputs	4 Channels
A/D Converter	16 bits - SAR Architecture (Successive Approximation Register) with temperature compensation
Measurement range	±20 mV (bipolar) or 0-40 mV (unipolar)
Non-linearity error	± 0.5 LSB
Repeatability (full scale, @ 25°C, Static Measurement Mode every 2s)	less than ± 0.025%
Repeatability (full scale, @ 25°C, Dynamic Measurement Mode 10Hz)	less than ± 0.35%
Sensor Connector	M12-4Pins , A-Coding, Waterproof IP67

SENSOR POWER SUPPLY SPECIFICATIONS

Power Supply	4.5 Volts to 20Volts , dynamically configurable from the BeanScape® 2.4GHz software
Power Supply precision (full scale, @25°C)	±0.18%
Maximum Output Power (@25°C)	1 Watts

EMBEDDED DATA LOGGER

Storage capacity	up to 1 million data points
Wireless data downloading	3 minutes to download the full memory (average time)

TECHNICAL SPECIFICATIONS

CONFIGURABLE SETTINGS FROM THE BEANSCAPE® 2.4GHz SOFTWARE

Data Acquisition mode	Static Data Acquisition : Low Duty Cycle Data Acquisition (LDCDA) and Alarm Mode (based on alarm thresholds). Measurement heartbeat 1s to 24 hour Dynamic data acquisition (not available on devices with ref. extension XT) Streaming and S.E.T. (Streaming with Event Trigger) Mode
Sampling Rate (SPS = samples per second)	Minimum: 1 SPS Maximum: 400 SPS maximum per channel
Alarm Threshold	3 levels of Alarm Threshold Alert-Action-Alarm
Sensor power supply	4.5 to 20 Volts
Power Mode	Battery saver mode & Active power mode

RF SPECIFICATIONS

Wireless Protocol Stack	Ultra-Power and license-free 2.4Ghz radio technology (IEEE 802.15.4E)
WSN Topology	Point-to-Point / Star
Data rate	250 Kbits/s
RF Characteristics	ISM 2.4GHz – 16 Channels
TX Power	+18 dBm
Receiver Sensitivity	-104 dBm
Maximum Radio Range (In Transmission Mode)	650m (Line of Sight) , 30-100m (Non Line of Sight) * ¹
Antenna diversity	<ul style="list-style-type: none"> • 2 omnidirectional N-Type antenna • Gain 5.5 dBi • Waterproof IP67

TIMESYNC FUNCTION : CLOCK SYNCHRONIZATION OVER THE WIRELESS IOT SENSOR

Clock synchronization accuracy	±2.5 ms (at 25°C)
Crystal specifications	Tolerance ±10ppm, stability ±10ppm

ENVIRONMENTAL AND MECHANICAL

Casing	Aluminum, Waterproof IP67 – Fire Protection : ULV94/Getex casing dimensions (w/o antenna, w eyelets) L x l x h : 156mm x 82mm x 57mm / Weight : 760g
Shocks resistance	50g during 50 ms
Operating Temperature	-40 °C to +60 °C
Norms	<ul style="list-style-type: none"> • CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 • FCC (North America) • ARIB STD-T66 Ver 3.6 • ROHS - Directive 2002/95/EC

TECHNICAL SPECIFICATIONS

POWER SUPPLY

Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring : • Overvoltage Protection, Overcurrent/Short-Circuit Protection, Undervoltage Protection • Battery Temperature monitoring
Current consumption @ 3.3V	• During data acquisition : 70mA to 130 mA (depends on external sensor power supply) • During Radio transmission : 70 mA • During sleeping: < 35 μ A
External power supply	External power supply : +8-28 VDC with polarity inversion protection
Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 2.2Ah with polyswitch protection

INCLUDED ACCESSORIES

	4 x M12 Cap 1 x M8 Cap 2 x High gain antenna 5.5 dBi / V.S.W.R : 1.5 :1 / Waterproof IP67
--	--

OPTIONAL ACCESSORIES AND SERVICES

External Power Supply	Wall plug-in, Switchmode power Supply 12V @ 1.25A with sealed M8 Plug (IP67/Nema 6) Ref: M8-PWR-12V
M8 extension cable for external power supply	Molded cable with M8-3pins male plug Material : PVC with shield protection IP Rating : IP67 Nema 6 Cable length : 2 meters , Ref: CBL-M8-2M Cable length : 5 meters, Ref: CBL-M8-5M Cable length: 10 meters, Ref: CBL-M8-10M
M12 Plastic ABS plug for sensors	M12-4 Pins Male plug for sensor interface Coding : A, Locking type: Fix screw, Material : Plastic ABS IP Rating: IP67 in locked condition Ref: M12-PL-SENSOR
M12 Aluminum plug for sensors	M12-4 Pins Male plug for sensor interface Coding : A, Locking type: Fix screw, Material: Aluminum IP Rating: IP67 in locked condition Ref: M12-AL-SENSOR
Antenna cable	N-Type cable (Male/Male), Cable type: RF-5/H155 Cable length: 1 meter, Ref: CBL-ANT-1M Cable length: 2 meters, Ref: CBL-ANT-2M Cable length: 3 meters, Ref: CBL-ANT-3M Cable length: 5 meters, Ref: CBL-ANT-5M Cable length: 10 meters, Ref: CBL-ANT-10M

BeanDevice® 2.4GHz AN-mV

High Gain antenna option

High Gain Omnidirectional antenna
Frequency range 2400-2500MHz
VSWR < 1.4, Impedance 50 Ohm, Polarization Vertical
Vertical plane 24°(7dBi Gain version) 16°(7dBi Gain version)
6°(12dBi Gain version), Horizontal plane 360°
Connector N female, Wind load (170km/h) 7.3N
Included: N-Type cable (Male/Male), length: 1 meter
Gain: 7dBi, Dimensions 360mm x 23mm, Weight 0.44 kg
[Ref: HG-OMNI-OUT-7DBI](#)
Gain: 9dBi, Dimensions 540x23 mm, Weight 0.61 kg
[Ref: HG-OMNI-OUT-9DBI](#)
Gain: 12dBi, Dimensions: 1125mm x 19 mm, Weight 1.06 kg
[Ref: HG-OMNI-OUT-12DBI](#)

Calibration certificate

Calibration certificate linked to German Accreditation
Body (DAkkS) [REF: CERT-CAL-PROCESS](#)

*1 650m L.O.S conditions is reached:


- Beangateway is positioned in Line Of Sight toward sensor (no obstacles, no radio interferences) with High Gain Antenna, with a Height of 3 meters minimum. 26dBm High Gain Directional Antenna is used on gateway side.
- On sensor side : Radome Antenna should point to Vertical Direction for better Coverity

PRODUCT OVERVIEW




SENSOR WIRING CODE

M12 Socket Pin assignment



Notch



M12 Socket Positioning Notch

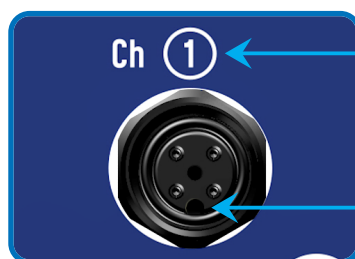

Sensor Channel Label

positioning notch



Wiring Code [Sensor Side]-Sensor with Analog Unipolar Output

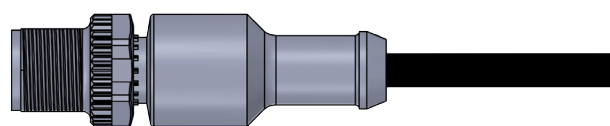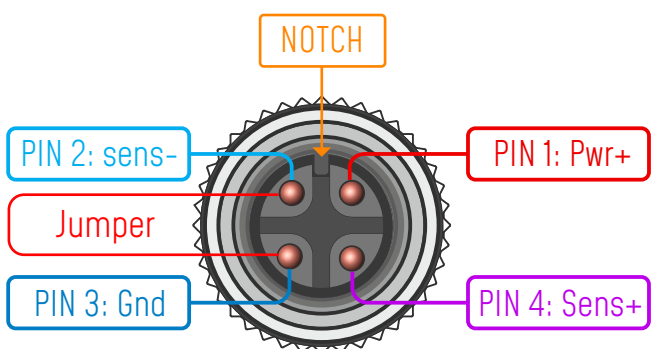

M12-4Pins Plug

CAPTION PIN 2 : Connected to Electrical Ground
PIN 3 [Gnd] : Electrical Ground
PIN 1 [Pwr+] : Sensor power supply
PIN 4 [Sens +] : Sensor Signal + input

Wiring Code [Sensor Side]-Sensor with Analog Bipolar Output

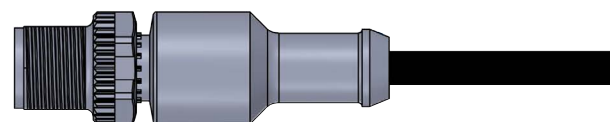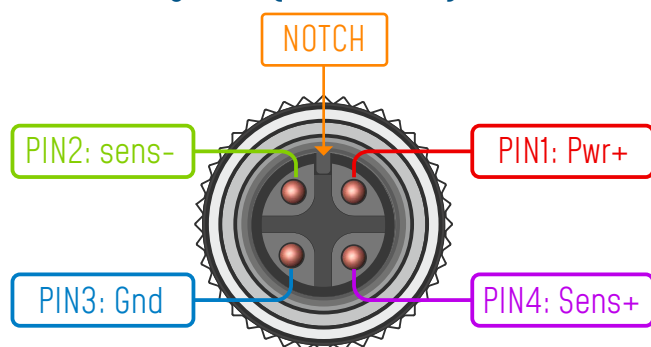

M12-4Pins Plug

CAPTION PIN 2 : Sensor signal - input
PIN 3 [Gnd] : Electrical Ground
PIN 1 [Pwr+] : Sensor power supply
PIN 4 [Sens +] : Sensor Signal + input

i If you use a unipolar analog sensor, Sens- pin must be connected to the electrical ground


! You can damage your sensor and/or your BeanDevice® if you don't respect the wiring code.

ACCESSORIES

AC/DC Power supply with M8 Plug

Ref: M8-PWR-12V

- Wall plug-in power supply,
Output: 12VDC, M8-3Pins plug
- AC Power plug: Europe/UK
Northamerica /China/Australia
- Waterproof - IP67

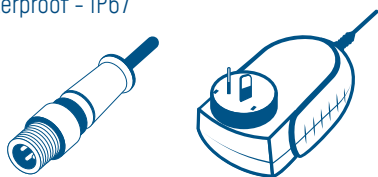

N-Type cable (Male/Male)

Ref: CBL_ANT_XXM

- length: 1 meter / 2 meters / 5 meters
- Cable type: RF-5/H155



Omnidirectional antenna 5dBi for outdoor use

Ref: HG_OMNI_5_OUT_DBI

- Waterproof design
- Outdoor use
- Professional N-type design
reduces stress
- N-type, Male, Reverse Polarity,
- VSWR < 2.0 / Length=95mm
- Wind survival: up to 180Mph
- Watertight IP65
- Waterproof - IP67



Molded Cable with M8 plug

Ref: CBL-M8-2M

- [cable length : 2 meters]
- CBL-M8-5M
[cable length : 5 meters]
- CBL-M8-10M
[cable length : 10 meters]



M12-4 Pins plug for sensor interface

M12-5 Pins plug for sensor interface


Ref: M12-PL-SENSOR

watertight IP67 - Material: Plastic ABS

M12-4 Pins plug for sensor interface

Ref: M12-AL-SENSOR

watertight IP67 - Material: Aluminum case



CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051



www.industrial-wsn.com




WWW.BEANAIR.COM



www.youtube.com/user/BeanairSensors



www.facebook.com/BeanAir



www.twitter.com/beanair



Above given technical data are only for information purpose.

BeanAir® Sensors has right to change product specifications without notice.