

HIGH PERFORMANCE WIRELESS IOT INCLINOMETER SENSOR | TILT, INCLINATION, SLOPE MONITORING

PRODUCT VIDEO



APPLICATION VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING



STEP FILE



2year
Warranty


MADE
IN
GERMANY




001A-08148



screw mounting

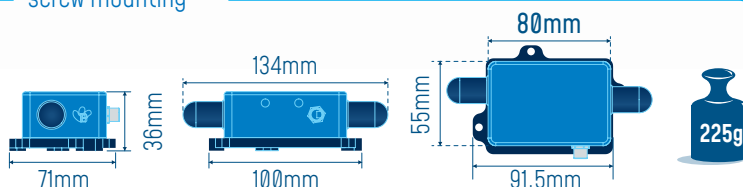

magnetic mounting

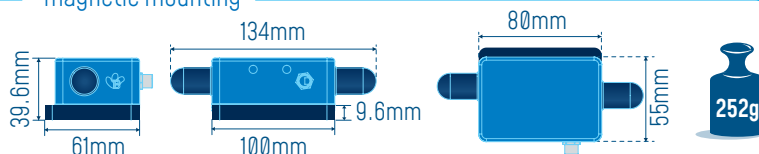

MAIN FEATURES



- High precision bi-axis inclinometer with great measurement repeatability ($\pm 0.005^\circ$ for bi-axis $\pm 15^\circ$ version, and $\pm 0.006^\circ$ for bi-axis $\pm 30^\circ$ version)



- Time-synchronized wireless sensor networks (± 2.5 ms of accuracy)



- Embedded data logger : up to 8 million data points (with events dating)



- Excellent radio link relying on the radio antenna diversity developed by Beanair®



- Waterproof IP67 casing (Nema 6)




- Integrated Lithium-Ion battery charger

APPLICATIONS



STRUCTURAL HEALTH MONITORING

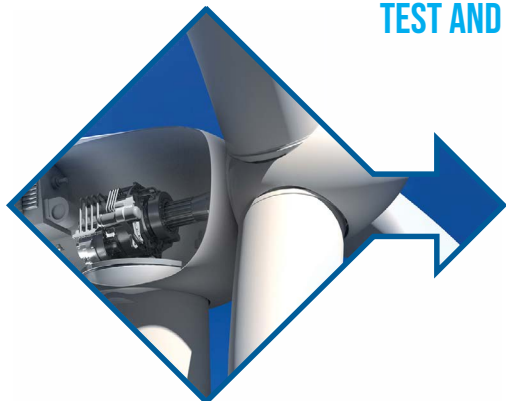

TEST AND MEASUREMENT



CONDITION MONITORING




LAND SURVEYING



For further information about bridge monitoring,
please read the following applications note :
AN_RF_002 – “Bridge monitoring with BeanAir® products”

TIME-SYNCHRONIZED WIRELESS IIOT SENSORS

TimeSync function brings time-synchronization over the Wireless IIOT Sensors Network (± 2.5 ms of accuracy between each wireless IIOT sensor) and contributes to enhance user experience about correlation of remote sensing data and modal analysis.

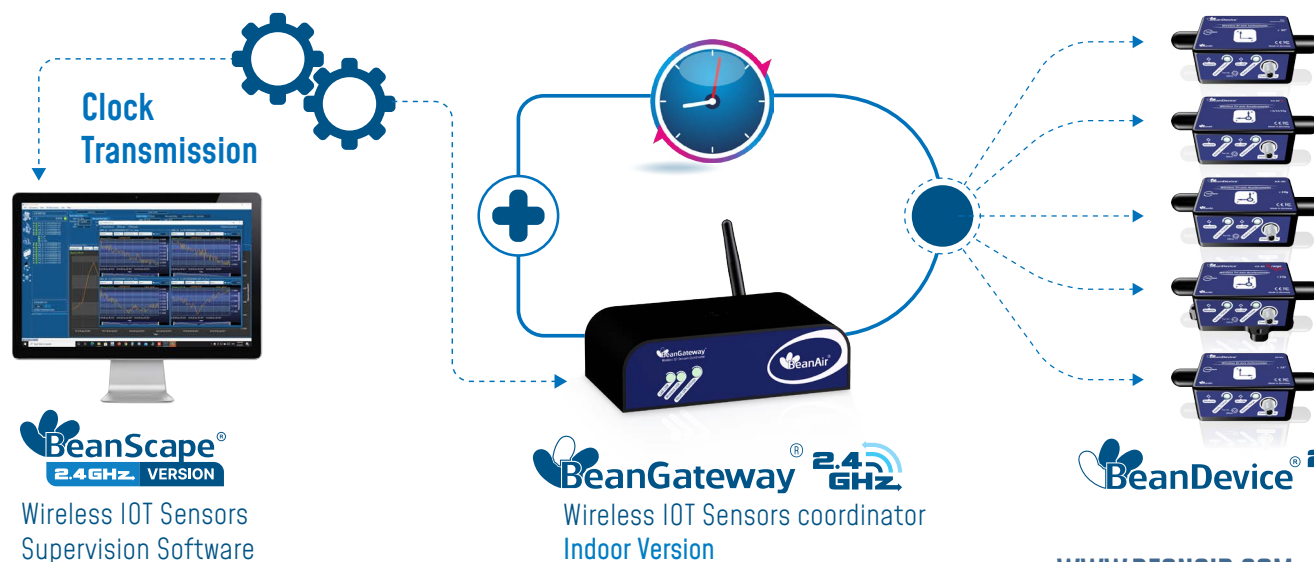

REMOTE CONFIGURATION & MONITORING

BeanScape® 2.4GHz Basic

A powerful and versatile supervision software for managing your wireless sensors

The **BeanScape® 2.4GHz** allows the user to view and manage all the data transmitted by the **BeanDevice® 2.4GHz HI-INC XRange**.

Thanks to the OTAC (Over-the-Air configuration) function, users can remotely configure the **BeanDevice® 2.4GHz HI-INC XRange**.

A versatile wireless inclinometer with different data acquisitions mode:

- **Low Duty Cycle Data Acquisition mode (LDCDA)** : Data acquisition is immediately transmitted by radio. Transmission frequency can be configured from the **BeanScape® 2.4GHz** software from 1s to 24h.
- **Survey Mode**: An alarm notification is transmitted when a threshold is reached. A powerful alarm management tool available on the **BeanScape® 2.4GHz** software allows the user to configure alarm threshold and to generate automatic alarm notification by email. A "heart beat" notification is frequently transmitted, and keeps the user informed about its current status.
- **Streaming Mode** : All measured data are transmitted by packet within a continuous flow at 60 samples per second maximum



For further information about the different data acquisition modes:
TN-RF-008 – "Data acquisition modes available on the **BeanDevice®**"

ANTENNA DIVERSITY

While the vast majority of wireless IIOT sensors show their limits in harsh industrial environment, the **BeanDevice® 2.4GHz HI-INC XRange** integrates an innovative antenna diversity design, boosting the radio link quality in environments subject to random and diverse disturbances. Antenna Diversity improves both the quality and reliability of a wireless link by 30%



EMBEDDED DATA LOGGER UP TO 8 MILLION DATA POINTS


The **BeanDevice® 2.4GHz HI-INC XRange** integrates an embedded datalogger, which can be used to log data when a Wireless IIOT Sensors can not be easily deployed on your site. All the data acquisition are stored on the embedded flash and then transmitted to the **BeanGateway® 2.4GHz** when a Wireless IIOT Sensors is established.

The data logger function is compatible with all the data acquisition mode available on the **BeanDevice® 2.4GHz HI-INC XRange** :

- LowDutyCycle Data Acquisition
- Survey
- Streaming packet

EXAMPLE : TILT MONITORING ON A BRIDGE

- In standalone operation, the **BeanDevice® 2.4GHz INC X-Range** stores all the measurements on its onboard datalogger. Thus, a direct connection with the **BeanGateway® 2.4GHz** is not needed.
- During the measurement campaign, all the acquired measurements are stored on datalogger.
- Data logs can be transmitted to the **BeanGateway® 2.4GHz** on request. Once a successful transmission is done, the user can choose to erase automatically the logs from the datalogger memory, so new ones can be stored.

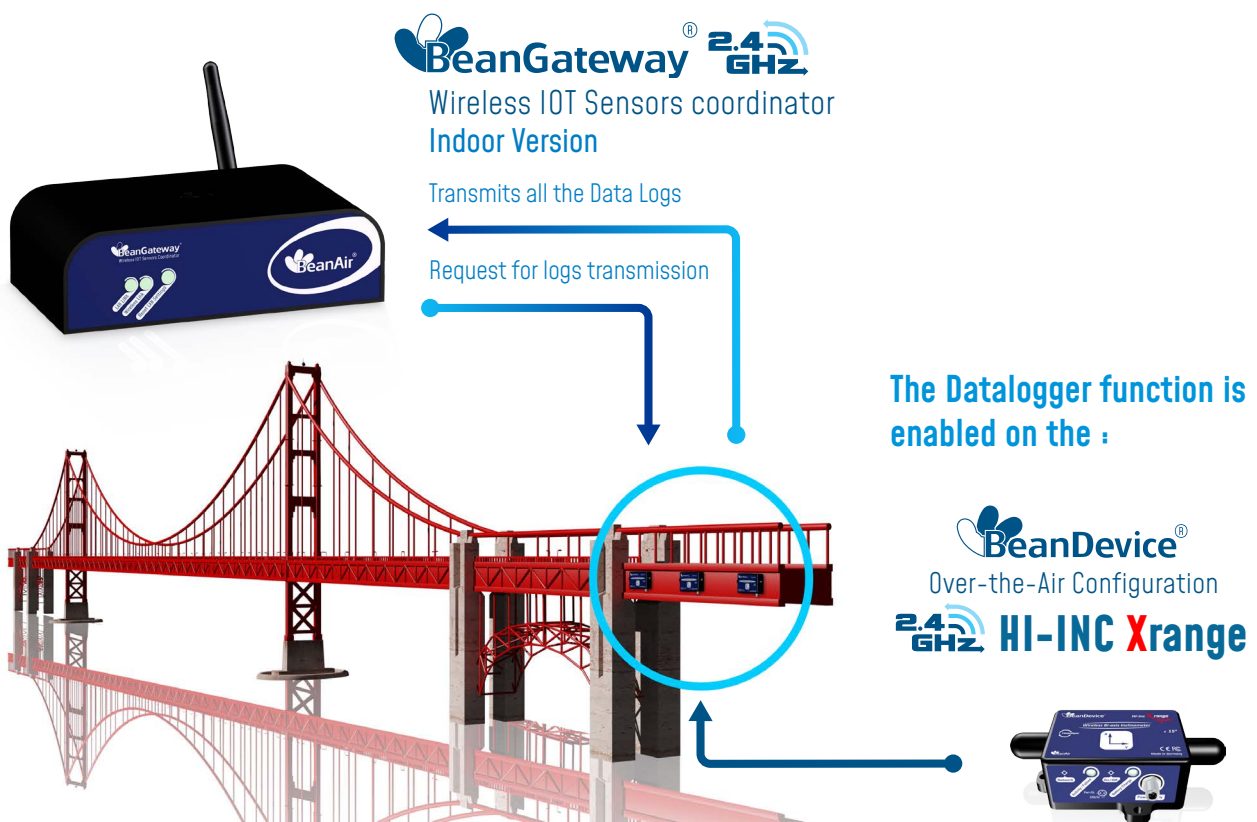

For further information about data logger, please read the following technical note :
TN-RF-007 – “**BeanDevice® DataLogger User Guide**”

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

BND-2.4GHZ-HI-INC-MR-XR-PS-MO-HG

MR – Measurement Range:
 - 30B : bi-axis $\pm 30^\circ$

PS - Power Supply

RB : Internal rechargeable battery

XT : External Power supply

MO - Mounting Option

SCM - Screw Mounting base

MM - Magnetic Mounting base

HG: High Gain External Antenna 5dBi

If this field is left blank, Integrated Radome Antenna will be provided

Example 1: BND-2.4GHZ-HI-INC-30B-XR-RB-SCM, High performance wireless Bi-axis inclinometer with $\pm 30^\circ$ measurement range, internal rechargeable battery, Screw mounting, radome Antenna

Example 2: BND-2.4GHZ-HI-INC-30B-XR-RB-SCM-HG, High performance wireless Bi-axis inclinometer with $\pm 30^\circ$ measurement range, internal rechargeable battery, Screw mounting, High Gain Antenna

SENSOR SPECIFICATIONS

Inclinometer Technology	Accurate and low power MEMS technology
Measurement resolution (Bandwidth 10 Hz)	0.001°
Noise density	0.0004 °/√Hz
Sensor precision (full scale, @ 25°C, Static Measurement Mode every 2s)	$\pm 0.006^\circ$ for bi-axis $\pm 30^\circ$ version
Offset temperature dependency (temperature range -25°C to +85°C)	$\pm 0.002^\circ/\text{C}$
Sensitivity temperature dependency (temperature range -25°C to +85°C)	$\pm 0.005\%/\text{C}$ with temperature compensation
Long term stability (@23°C)	< 0.004 °
Analog to Digital converter	16-bits, SAR architecture (Successive Approximation Register) with temperature compensation
Sensor frequency Response (-3 dB)	DC to 28 Hz
Noise spectral density DC to 100 Hz	0.0004 °/√Hz
Anti-aliasing Hardware filter	Butterworth 5th order filter – cut-off frequency : 1 Hz to 100 Hz remotely programmable (BeanScape®)

TECHNICAL SPECIFICATIONS

CONFIGURABLE SETTINGS FROM THE BEANSCAPE® 2.4GHZ SOFTWARE

Data Acquisition mode (SPS = sample per second)	Static Data Acquisition: Low Duty Cycle Data Acquisition (LDCDA) and Alarm Mode (based on alarm thresholds). Measurement heartbeat 1s to 24 hour Dynamic data acquisition(not available on devices with ref. extension XT): Streaming and S.E.T.(Streaming with Event Trigger) Mode
Sampling Rate (in streaming and S.E.T. mode)	Minimum: 1 SPS Maximum: 100 SPS on each axis
Alarm Threshold	Three-level alarms : Alert < Action < Alarm
Programmable cut-off frequency (Anti-aliasing filter)	1 – 100 Hz
Power Mode	Battery saver mode & Active power mode (not available on XT version, External power supply)

RF SPECIFICATIONS

Wireless Technology	Ultra-Low-Power and license-free 2.4Ghz radio technology (IEEE 802.15.4E)
WSN Topology	Point-to-Point / Star
Data rate	250 Kbits/s
RF Characteristics	ISM 2.4GHz – 16 Channels. Antenna diversity designed by Beanair®
TX Power	+18 dBm
Receiver Sensitivity	-104dBm
Maximum Radio Range (In Transmission Mode)	High Gain Antenna : 400-500m (L.O.S), 60-120m (N.L.O.S.) Integrated Radome Antenna : 200-300m (L.O.S), 30-60m (N.L.O.S.)
Antenna	Antenna diversity : High Gain Antenna : 2 x N-Type Antenna 5dBi , IP67 Radome Antenna : 2 x Antenna 1.9 dBi , IP67

EMBEDDED DATA LOGGER

Storage capacity	up to 8 millions data points
Wireless data downloading	20 minutes to download the full memory (average time)

TIMESYNC FUNCTION : CLOCK SYNCHRONIZATION OVER THE WIRELESS IOT SENSORS

Clock synchronization accuracy	±2.5 ms (at 25°C)
Crystal specifications	Tolerance ±10ppm, stability ±10ppm

ENVIRONMENTAL AND MECHANICAL

Casing	Aluminum AL6061 & Waterproof casing • Dimensions in mm (LxWxH): 100 x 71 x 38 (without Radome antennas, with mounting eyelet) • Weight (with internal battery & Radome Antenna) : 240g (screw mounting) 265g (magnetic mounting) • Weight (with internal battery & High Gain Antenna) : 440g (screw mounting) 465g (magnetic mounting)
IP NEMA Rating	IP67 Nema 6
Shock resistance	150g during 50 ms
Operating Temperature	RB : Internal rechargeable battery -40 °C to +60 °C XT : External Power Supply -40 °C to +75 °C during battery discharge A Sunshield must be used if the sensor is exposed to direct sun radiation.
Norms & Radio Certifications	• CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 • FCC (North America) • ARIB STD-T66 Ver 3.6 ROHS - Directive 2002/95/EC
Maximum Humidity	90 %RH
Base Plate	-Aluminum black anodized AL 7075 with rugged three-point-mounting -Screw Mounting Option: the device should be mounted on a flat and smooth surface with 3 screws, dimension M5. Mounting torque 5 ±1Nm -Magnetic Mounting Option: the device should be mounted on a steel surface.

POWER SUPPLY

Integrated battery charger	Integrated Lithium-ion battery charger with high precision attery monitoring : • Overvoltage/Overcurrent/Short-Circuit/ Undervoltage protection • Battery Temperature monitoring
Current consumption @3.3V	• During data acquisition : 30 to 40 mA • During Radio transmission : 80 mA @ 18 dBm • During Battery Saver Mode : < 30 µA
External power supply	8-28VDC with reverse polarity protection IEC-61000-4-2: ESD 30kV(Air), 30kV (Contact) Surge protection > 28VDC (600W during 10us max)
Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 2.2Ah with polyswitch protection

INCLUDED ACCESSORIES

	1x Magnet to Power ON/Power OFF the device
	1x M8 Cap for Power Supply

OPTIONAL ACCESSORIES AND SERVICES

External Power Supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with sealed M8 Plug (IP67/Nema 6) Ref : M8-PWR-12V
Solar Panel Kit (compatible with External Power Supply version only)	Ref.: X-SOL-7AH-20W-4V-5M for XT version Ref.: X-SOL-7AH-20W-12V-5M for RB version Ref: X-SOL-14AH-20W-4CH-4V-5M for XT version Ref: X-SOL-14AH-20W-4CH-12V-5M for RB version Ref: X-SOL-14AH-80W-4CH-4V-5M for XT version Ref: X-SOL-14AH-80W-4CH-12V-5M for RB version
Bracket Mounting	90° Bracket for BeanDevice (Xrange smartsensor) with 4 x M5 screws + Locknut Ref : SMART-BRACK-MNT
External Primary Cell in a Waterproof IP67 Casing	Waterproof IP67 battery box for long-term monitoring applications IP67 Battery Holder Battery Pack with 3 x C size primary cell, Li-SOCL2 Lithium Primary cell 3.6VDC Type Ref : PRIM-XTENDER
M8 extension cable for external power supply	Molded cable with M8-3pins male plug Material: PVC with shield protection IP Rating : IP67 Nema 6 Cable length : 2 meters, Ref : CBL-M8-2M Cable length : 5 meters, Ref : CBL-M8-5M Cable length : 10 meters, Ref : CBL-M8-10M
Calibration certificate	Calibration certificate provided by Beanair GmbH A static calibration method is used on a granite surface plate DIN876 Ref : CERT-CAL-SMART

500m L.O.S conditions is reached:

- Beangateway is positioned in Line Of Sight toward sensor (no obstacles, no radio interferences) with High Gain Antenna, with a Height of 3 meters minimum. 26dBm High Gain Directional Antenna is used on gateway side.
- On sensor side : Radome Antenna should point to Vertical Direction for better Coverity

BEANDEVICE® 2.4GHZ HI-INC XRANGE FRONT VIEW





Product specifications are subject to change without notice.
Contact Beanair for latest specifications.

BeanDevice® 2.4GHZ HI-INC XRANGE



EXTERNAL POWER SUPPLY WIRING CODE

M8 Socket [A-Coding] - Pin Assignment

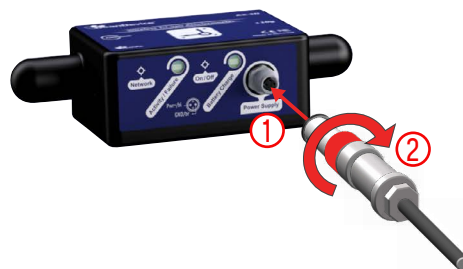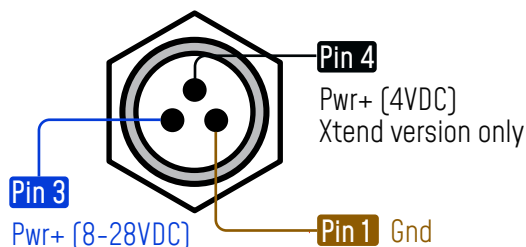


Interface Name	M8 Pin assignment	Wire Color [A-coding]
Power Supply 8-28VDC	PIN 3	Blue
Power Supply 4VDC [available on Xtend version only]	PIN 4	Black
Ground	PIN 1	Brown

M8 Plug [A -Coding] - Pin Assignment

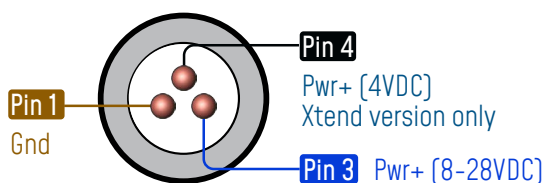


Do not power PIN4 and PIN3 at the same time, you will damage your Beandevic


OPTIONS AND ACCESSORIES



Solar Panel Kit




High efficiency solar panel with solar charging controller and Lead-acid battery
Ref: X-SOL-SLP-VOUT-CL




External Power-Supply

Wall plug-in, Switchmode power Supply 12V @ 1,25A with sealed M8 Plug [IP67/Nema 6]
Ref: M8-PWR-12V

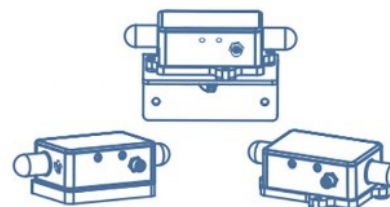

Mechanical Mounting Options


- 90° Bracket for BeanDevice [Xrange smartsensor] with 4 x M5 screws + Locknut
Ref: SMART-BRACK-MNT
- Magnetic Mounting Lid

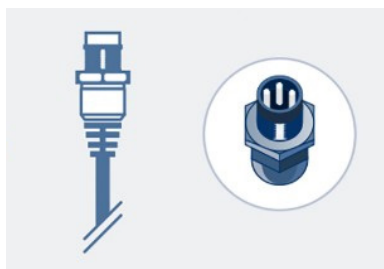

M8 extension cable for external power supply

Molded cable with M8-3pins male plug
Material: PVC with shield protection
IP Rating : IP67 | Nema 6
Cable length: 2 meters , Ref: CBL-M8-2M
Cable length : 5 meters, Ref: CBL-M8-5M
Cable length: 10 meters, Ref: CBL-M8-10M

DRAWING

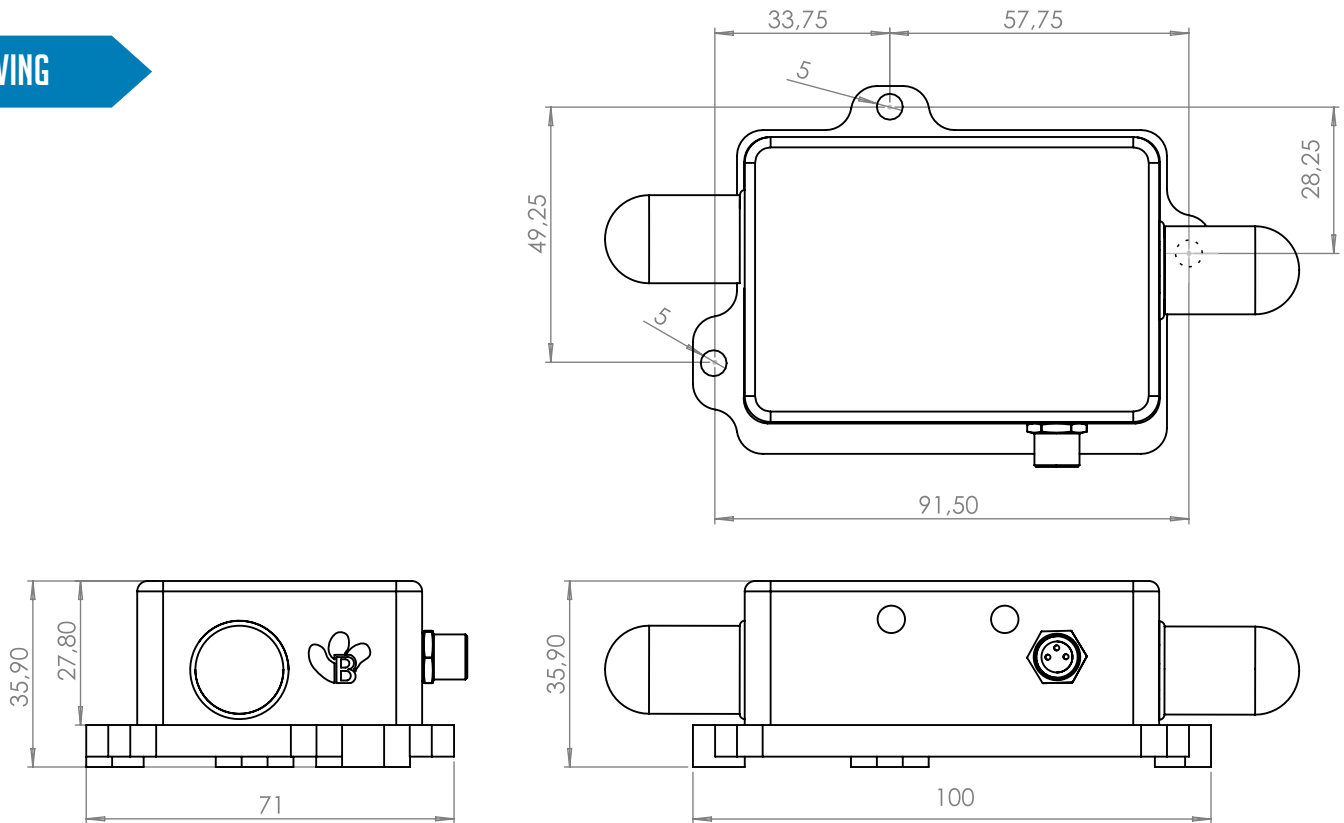

CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051



www.facebook.com/BeanAir



www.beanair.com



www.youtube.com/user/BeanairSensors



www.twitter.com/beanair



Above given technical data are only for information purpose.

BeanAir® Sensors has right to change product specifications without notice.