



REFERENCE

SK-VIB-AX-3D-2G-XR-SCM-OUT

PRODUCT VIDEO



USER GUIDE



QUICK START



DESCRIPTION

This wireless IOT vibration starterkit includes everything you need to setup quickly your vibration monitoring application :

- Wireless Receiver/Gateway with LAN Output, IP67 casing (Ref: [BeanGateway® Outdoor](#))
- Wireless Vibration sensor with screw mounting base, measurement range $\pm 2g$ (ref: [BeanDevice® 2.4GHZ AX-3D XR](#) range $\pm 2g$)
- 1 x Free software to collect and display in real-time data measurement from (Ref: [BeanScope® 2.4GHZ PREMIUM](#))
- AC/DC Power Adapter (US or EUR or UK plugs) for charging the battery or to be used constantly

MAIN FEATURES

- Wireless vibration sensor (measurement range $\pm 2g$) with real-time FFT and Velocity values
- Global License-free band 2.4GHz, with maximum radio range 500 meters
- Ultra Low Noise vibration sensor ($45 \mu g/\sqrt{Hz}$)
- Time-synchronized data acquisition ($\pm 2.5ms$ of accuracy)
- Waterproof IP67 aluminum casing (Nema 6)
- Rechargeable Lithium-Polymer battery 2200 mAh providing a battery life up to 15 months
- **Embedded data logger** : up to 8 million data points (with events dating)

Beanair products are Made in Germany and are certified CE/FCC/Giteki

WEBLINKS TO PRODUCTS

- Wireless vibration sensor
- Wireless Receiver/Gateway
- Eco-friendly Monitoring Software with Real-Time FFT

HOW IT WORKS ?

BeanScape® 2.4GHz
Wireless IOT Supervision Software

IOT Gateway | Outdoor Version


WirelessLink
2.4GHz

Ethernet LAN

BeanDevice® 2.4GHz AX-3D X-RANGE
Wireless IOT Vibration Sensor
High performance version



DRAWING

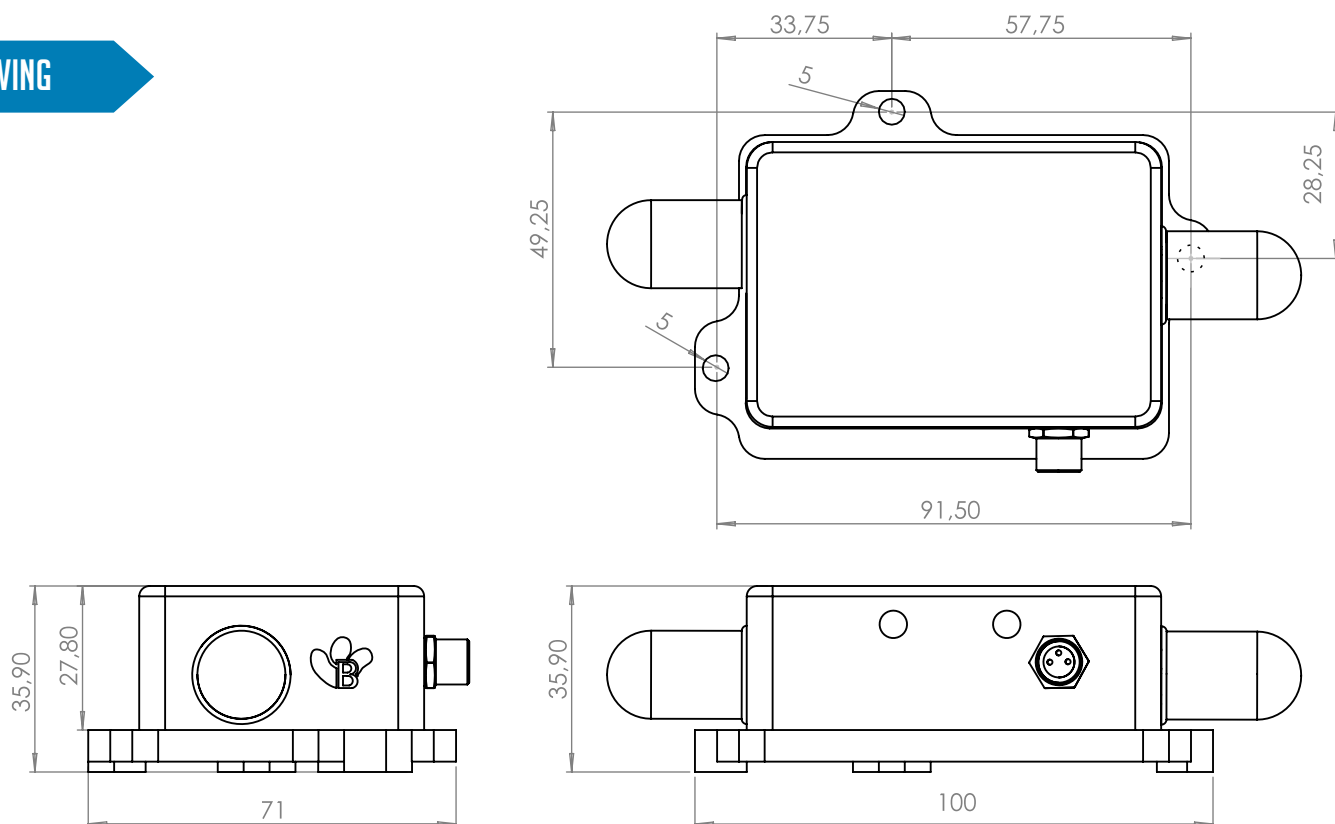

CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051



www.facebook.com/BeanAir



www.beanair.com



www.youtube.com/user/BeanairSensors



www.twitter.com/beanair

