



REFERENCE SK-HI-INC-SR-SCM-HG-OUT

PRODUCT VIDEO

USER GUIDE

QUICK START



DESCRIPTION

This wireless IOT inclinometer starterkit includes everything you need to setup quickly your inclination / tilt monitoring application :

- Wireless Receiver/Gateway with LAN Output, IP67 casing (Ref: [BeanGateway® Outdoor](#))
- Wireless ultra-accurate Tri-Axis Inclinometer sensor with screw mounting option (ref: [BeanDevice 2.4GHZ HI-INC SR](#))
- 1 x Free software to collect and display in real-time data measurement (Ref: [BeanScape® 2.4GHZ LITE](#))
- AC/DC Power Adapter (US or EUR or UK plugs) for charging the battery or to be used constantly

MAIN FEATURES

- Scalable Range: $\pm 10^\circ$ or $\pm 90^\circ$ with automatic range adjustment
- Ultra precise sensor ($\pm 0.01^\circ$ for 10° range)
- Global License-free band 2.4GHZ, with maximum radio range 500 meters in L.O.S
- Time-synchronized data acquisition ($\pm 2.5\text{ms}$ of accuracy)
- Waterproof IP67 aluminum casing (Nema 6) with screw mounting base
- Rechargeable Lithium-Polymer battery 2200 mAh providing a battery life up to 15 months
- **Embedded data logger** : up to 8 million data points (with events dating)
- 1 x Free software to collect and display in real-time data measurement (Ref: BNSC-2.4GHZ-LITE)
- 1x Wireless Receiver/Gateway + Outdoor Casing + LAN Output (Ref: BGTW-2.4GHZ-ETH-OUT)
- AC/DC Power Adapter (US or EUR or UK plugs) for charging the battery or to be used constantly (ref: M8-PWR-12V)

BeanAir® products are Made in Germany and are certified CE/FCC/Giteki, **HS code: 9031.80.20**

WEBLINKS TO PRODUCTS

- Wireless Tri Axis Inclinator Sensor
- Wireless Receiver/Gateway
- Eco-friendly Monitoring Software

HOW IT WORKS ?

BeanScape® 2.4GHz LITE
Wireless IOT Supervision Software


Wireless IOT Gateway | Outdoor Version

WirelessLink
2.4GHz

Ethernet LAN

BeanDevice® 2.4GHz HI-INC-SR
Wireless IOT TRI AXIS inclinometer Sensor
Scalable Measuring Range $\pm 10^\circ$ and $\pm 90^\circ$

DRAWING

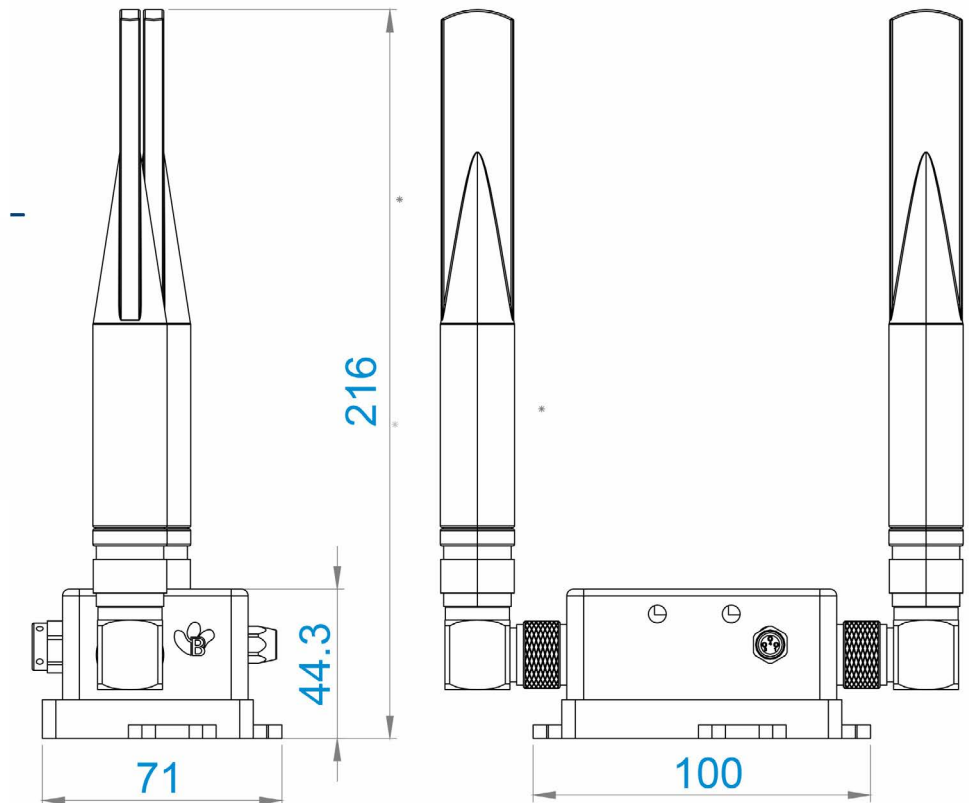

CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051



www.facebook.com/BeanAir



www.beanair.com



www.youtube.com/user/BeanairSensors



www.twitter.com/beanair

