



REFERENCE **SK-ONE-TH-OUTDOOR**

DESCRIPTION

PRODUCT VIDEO



USER GUIDE



QUICK START



Get Started Instantly with Our Wireless IoT Temperature and Humidity Sensors Starter Kit :

- Wireless Receiver/Gateway with LAN Output, IP67 casing (Ref: BeanGateway® Outdoor)
- Wireless IOT Temperature and Humidity Sensors (ref: BeanDevice® ONE-TH)
- 1 x Free software to collect and display in real-time data measurement from the temperature/humidity sensor (Ref: BeanScape® 2.4GHZ LITE)

MAIN FEATURES

- High accuracy temperature sensor, meas. range -40°C to +85°C - accuracy : $\pm 0.1^{\circ}\text{C}$
- High accuracy humidity sensor, meas. range 0 to 100% RH - accuracy : $\pm 1.5\% \text{ RH}$
- **Maximum radio range:** 300 m (Line of Sight) , 30-80m (Non Line of Sight)
- **Casing:** Polycarbonate, Waterproof IP67 – Fire Protection : ULV94
- **Primary cell capacity:** Lithium-thionyl chloride battery with 2100 mAh capacity (AA size)
- **Embedded data logger :** up to 1 million data points

Beanair products are Made in Germany and are certified CE/FCC/Giteki


HOW IT WORKS ?



WEBLINKS TO PRODUCTS

- Wireless IOT Temperature and Humidity Sensors
- Wireless Receiver/Gateway
- Eco-friendly Monitoring Software

DRAWING

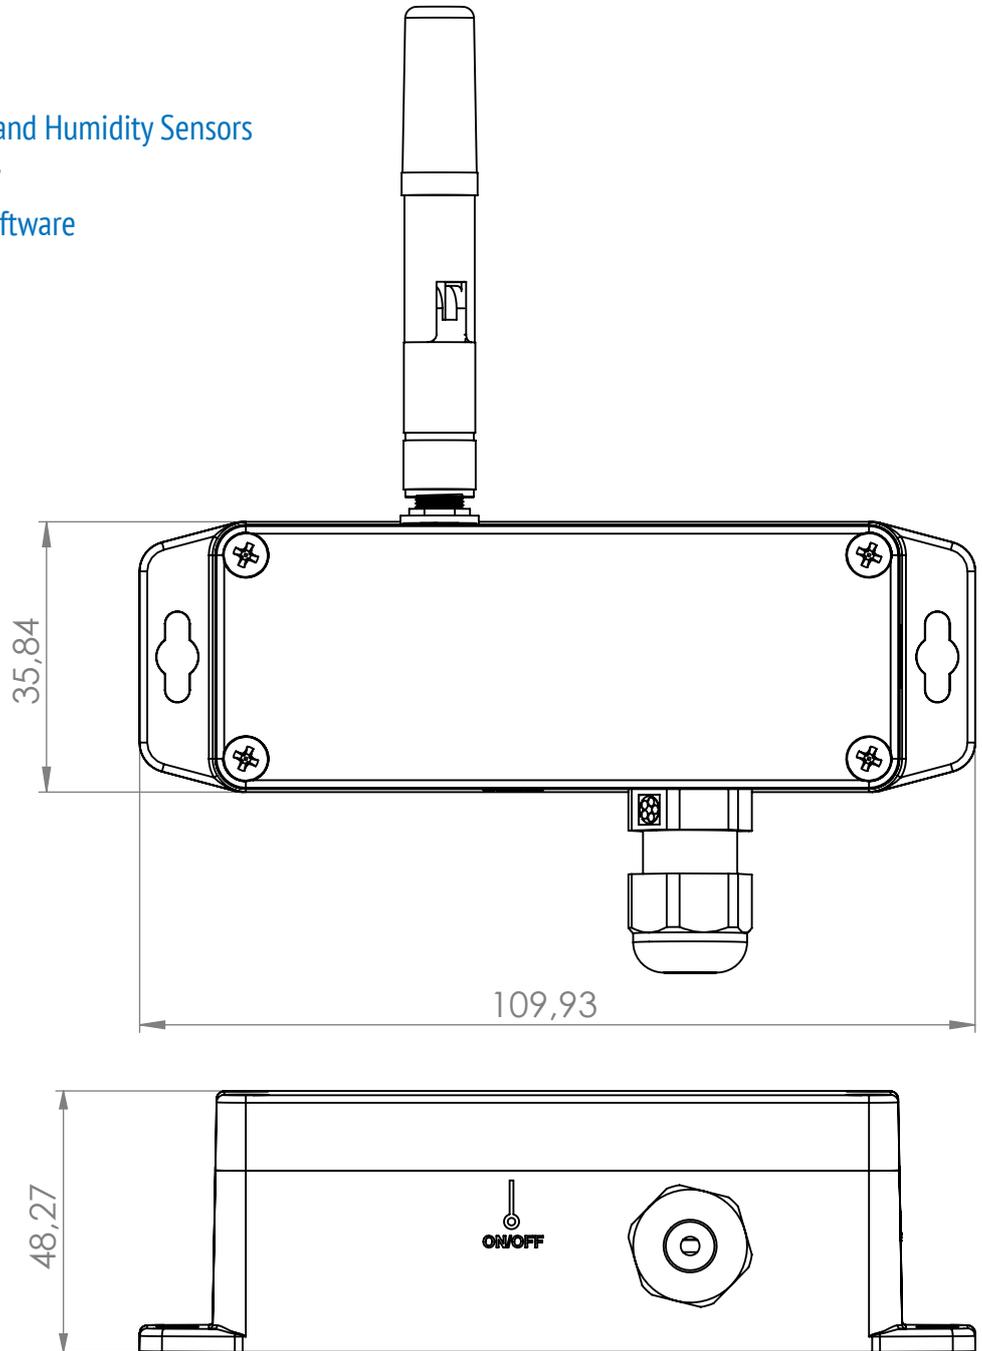

CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051